


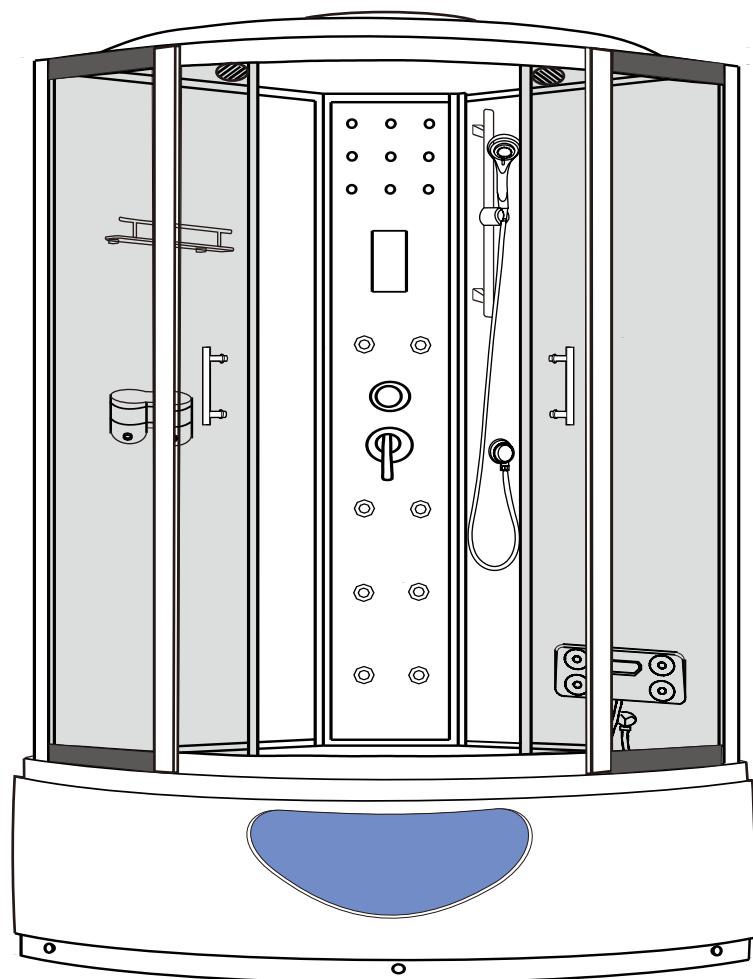


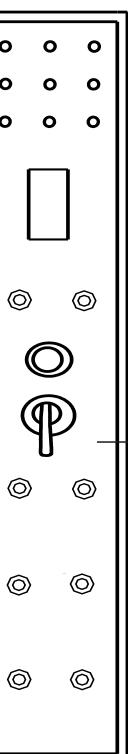

INSTALLATION MANUAL

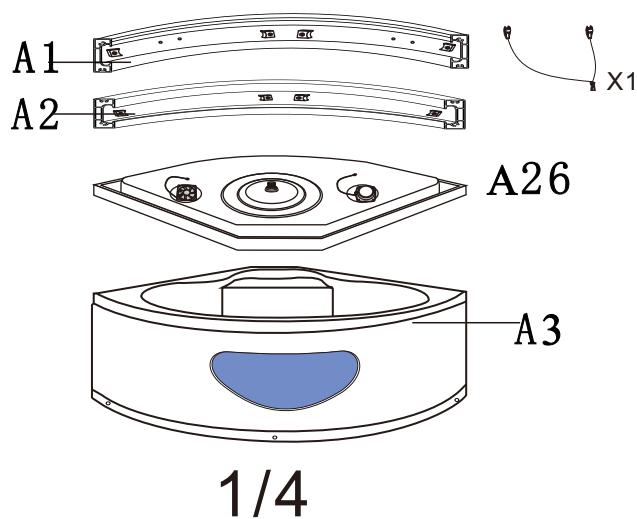



BK-035
1500X1500X2200mm

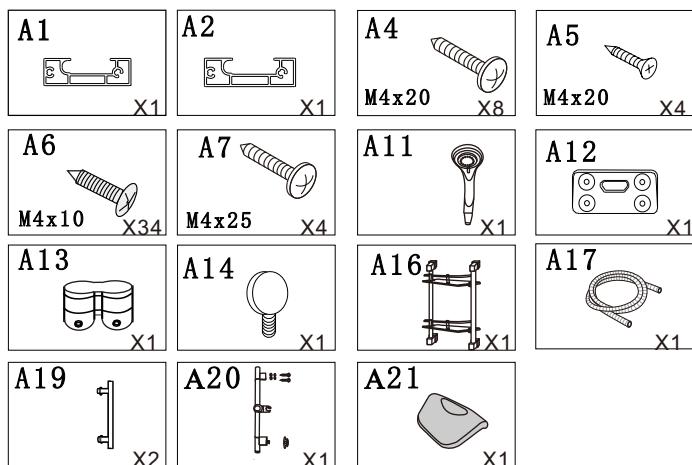


A24

2/4



1/4

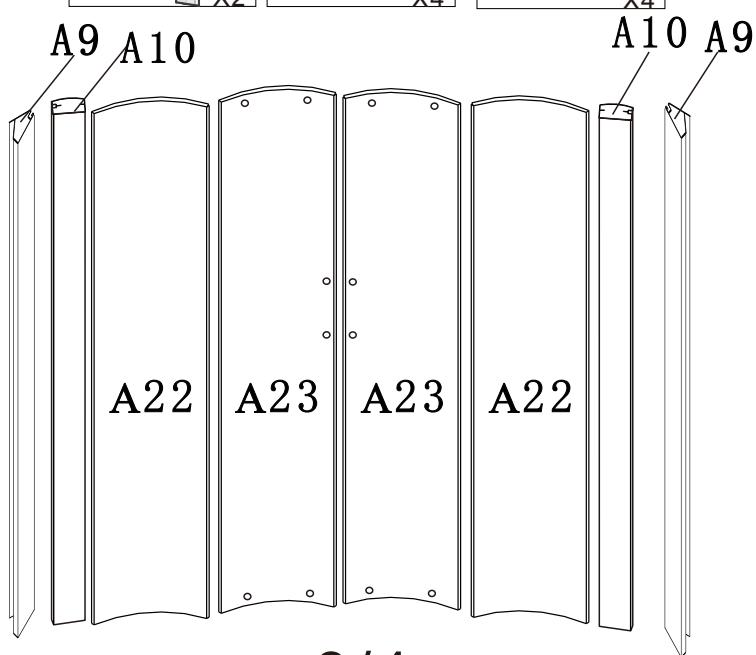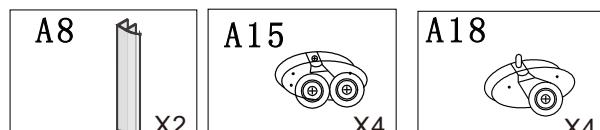






3/4










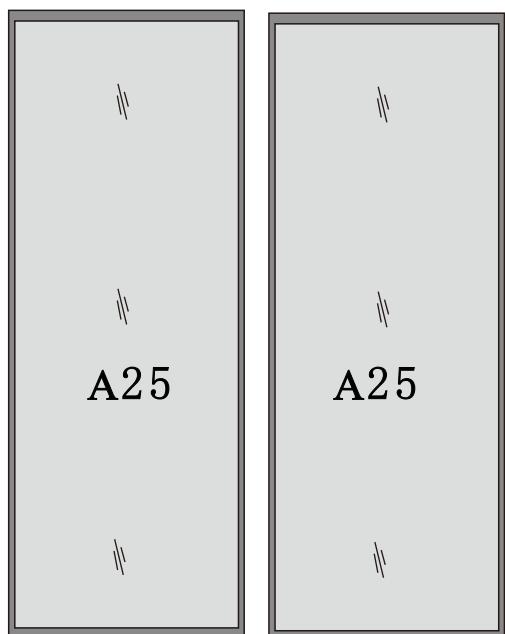



4/4







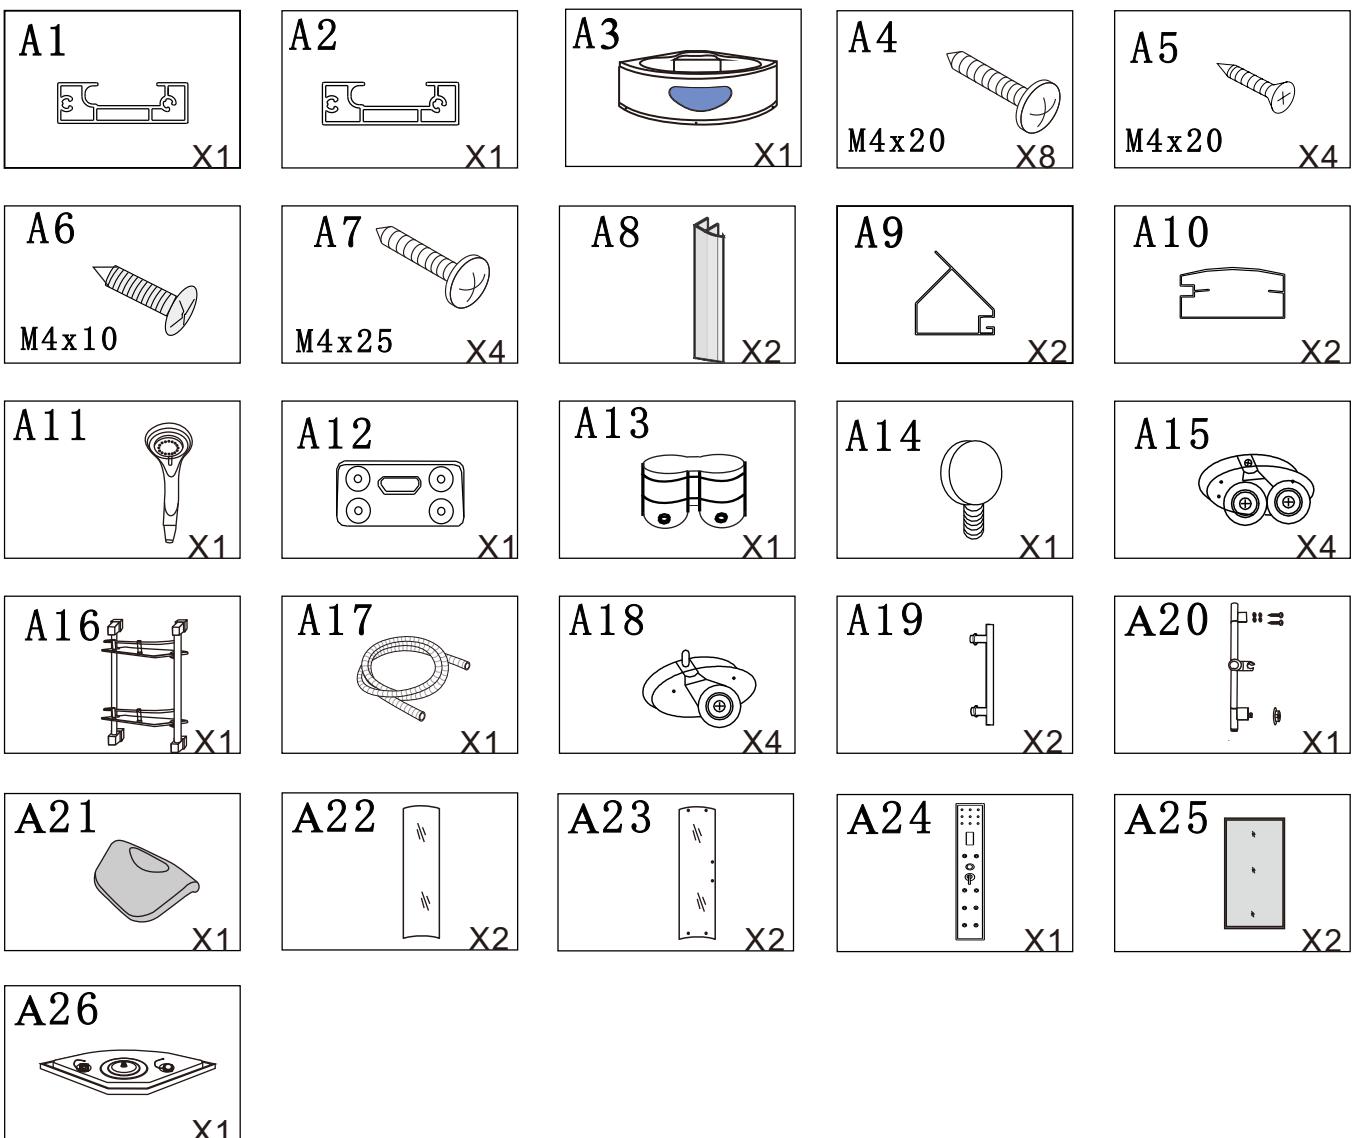
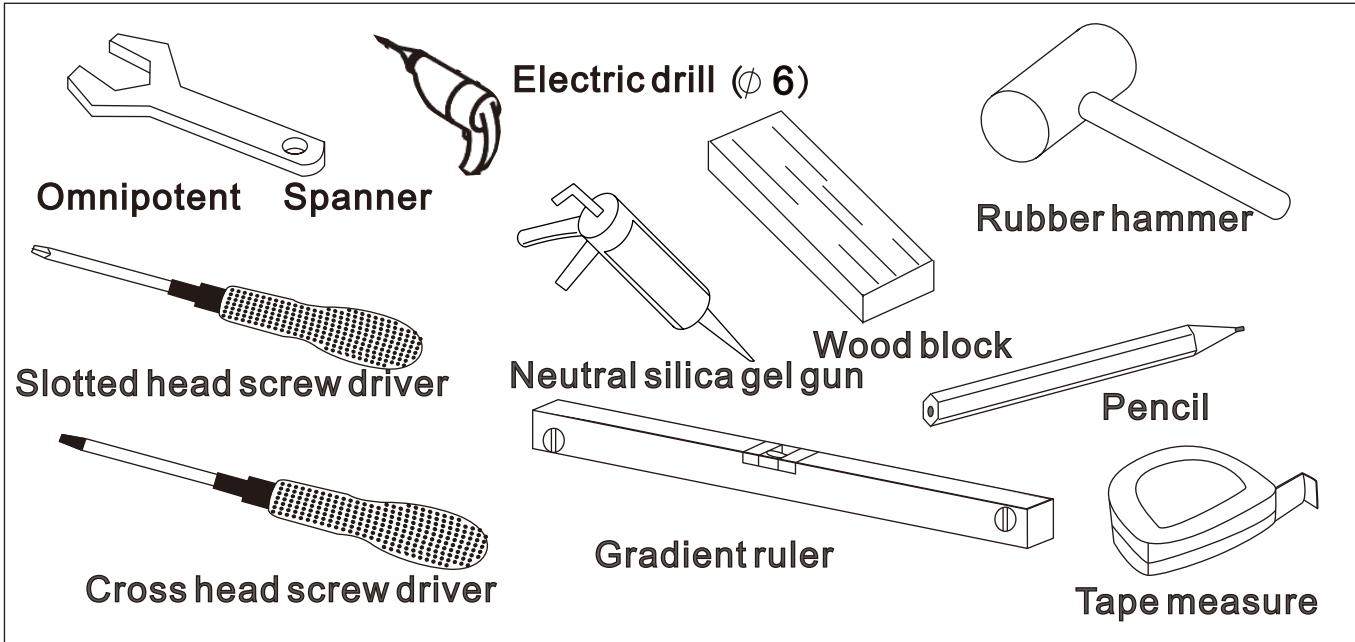





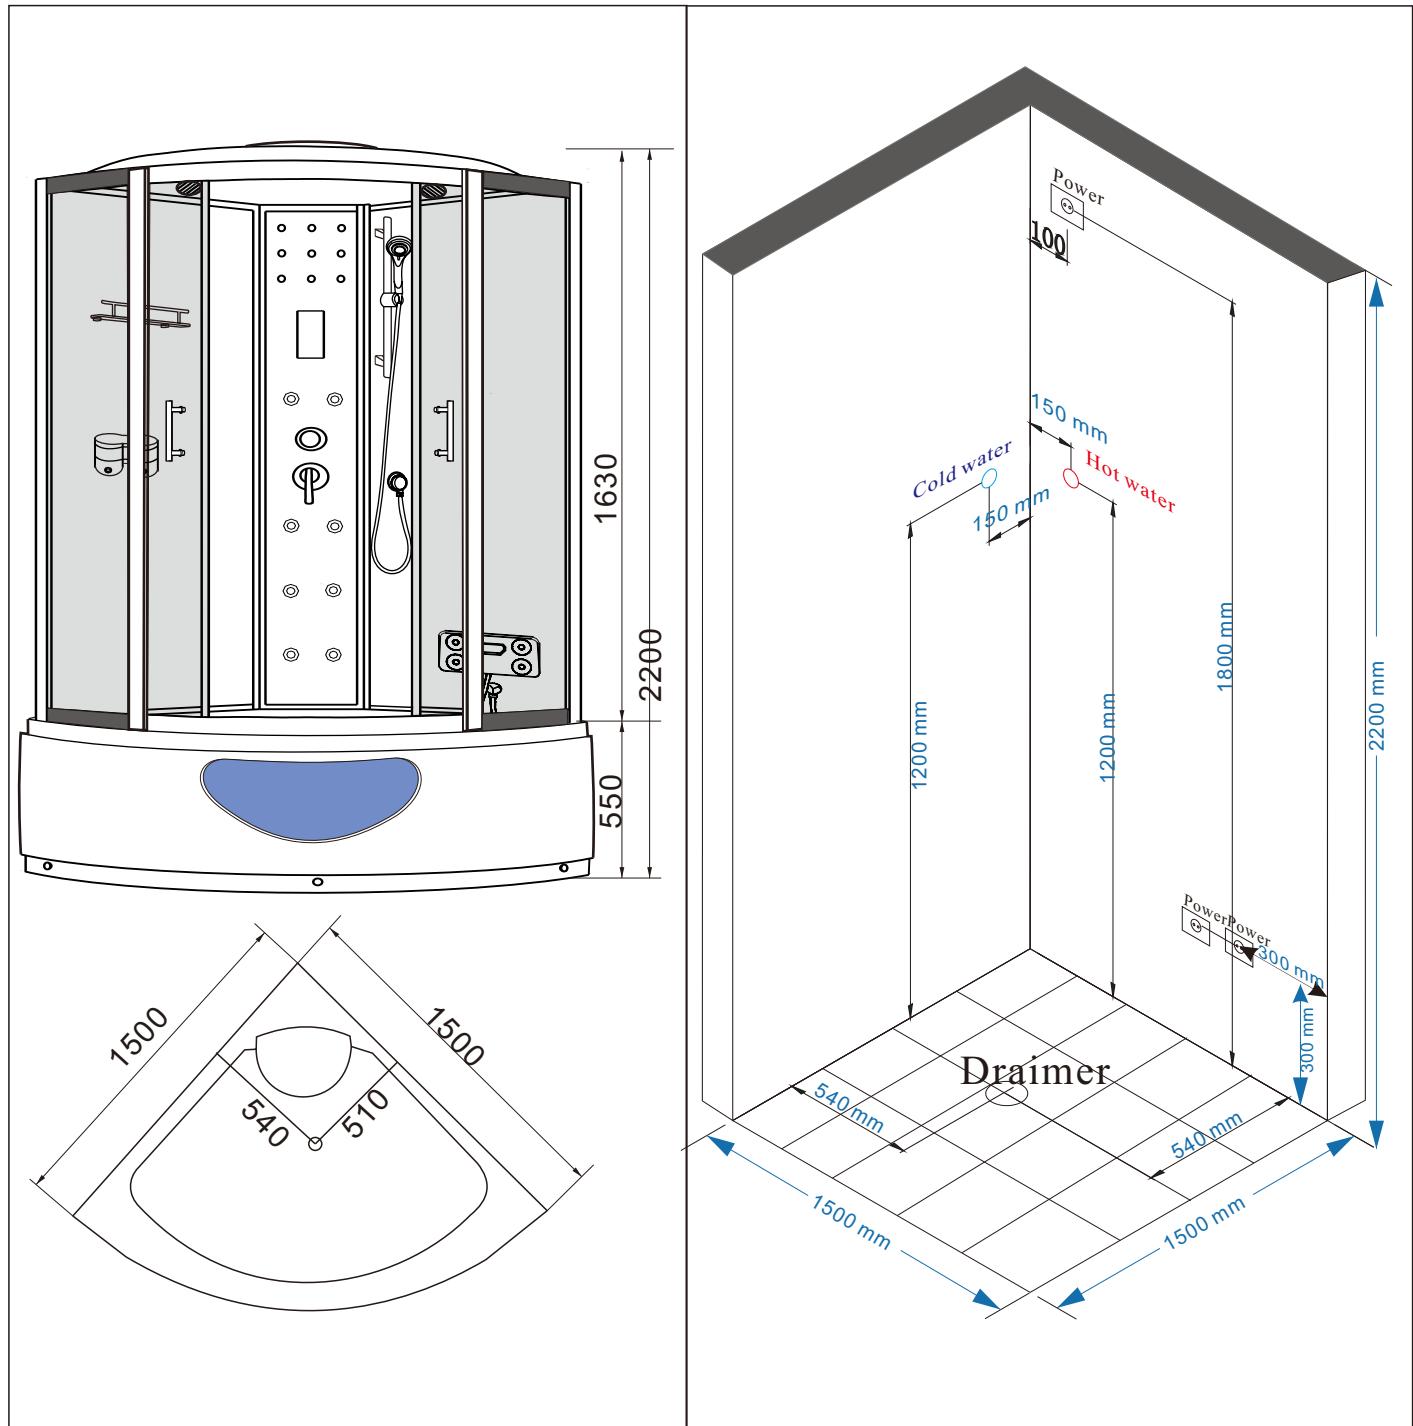


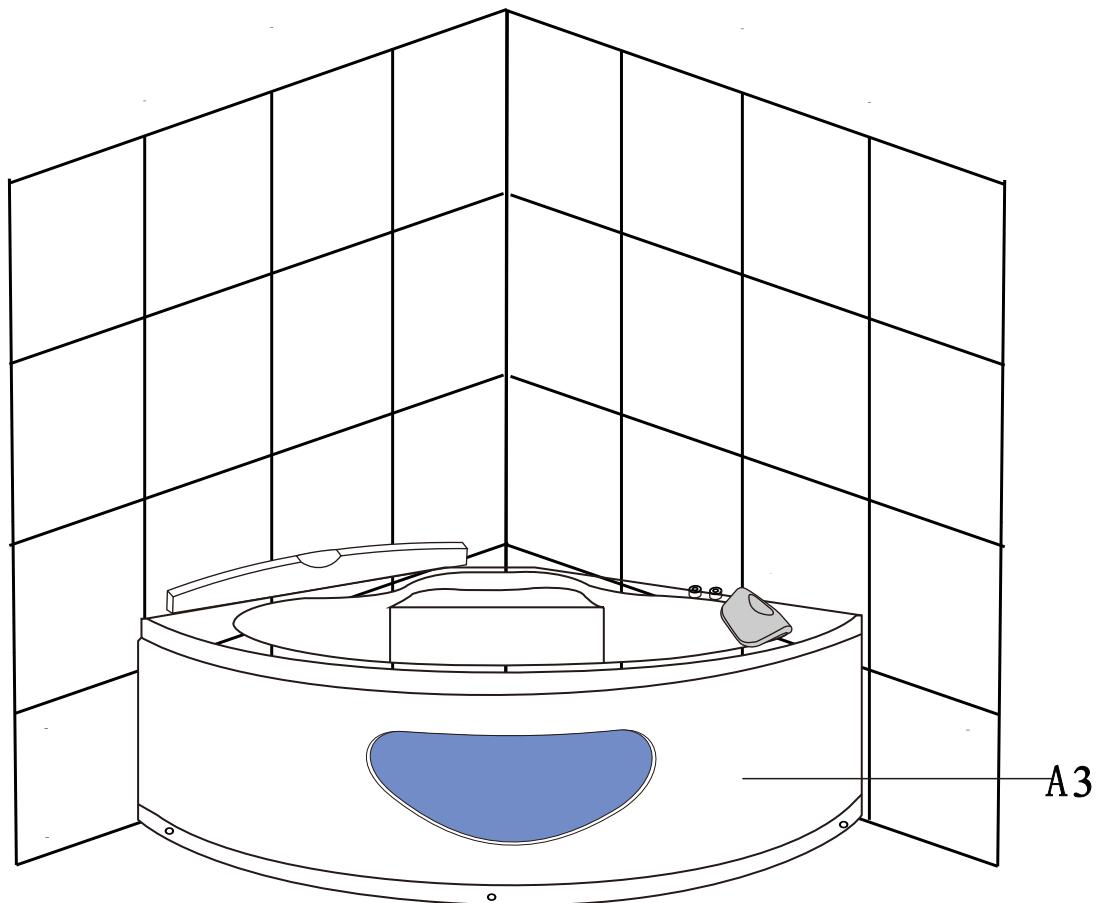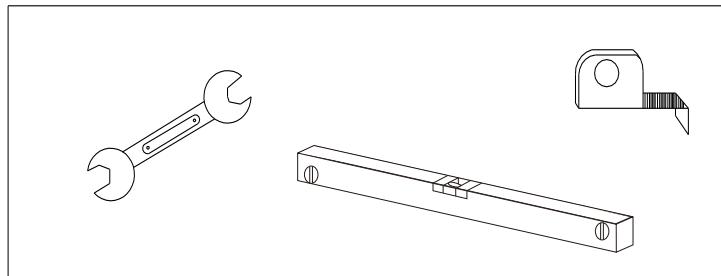


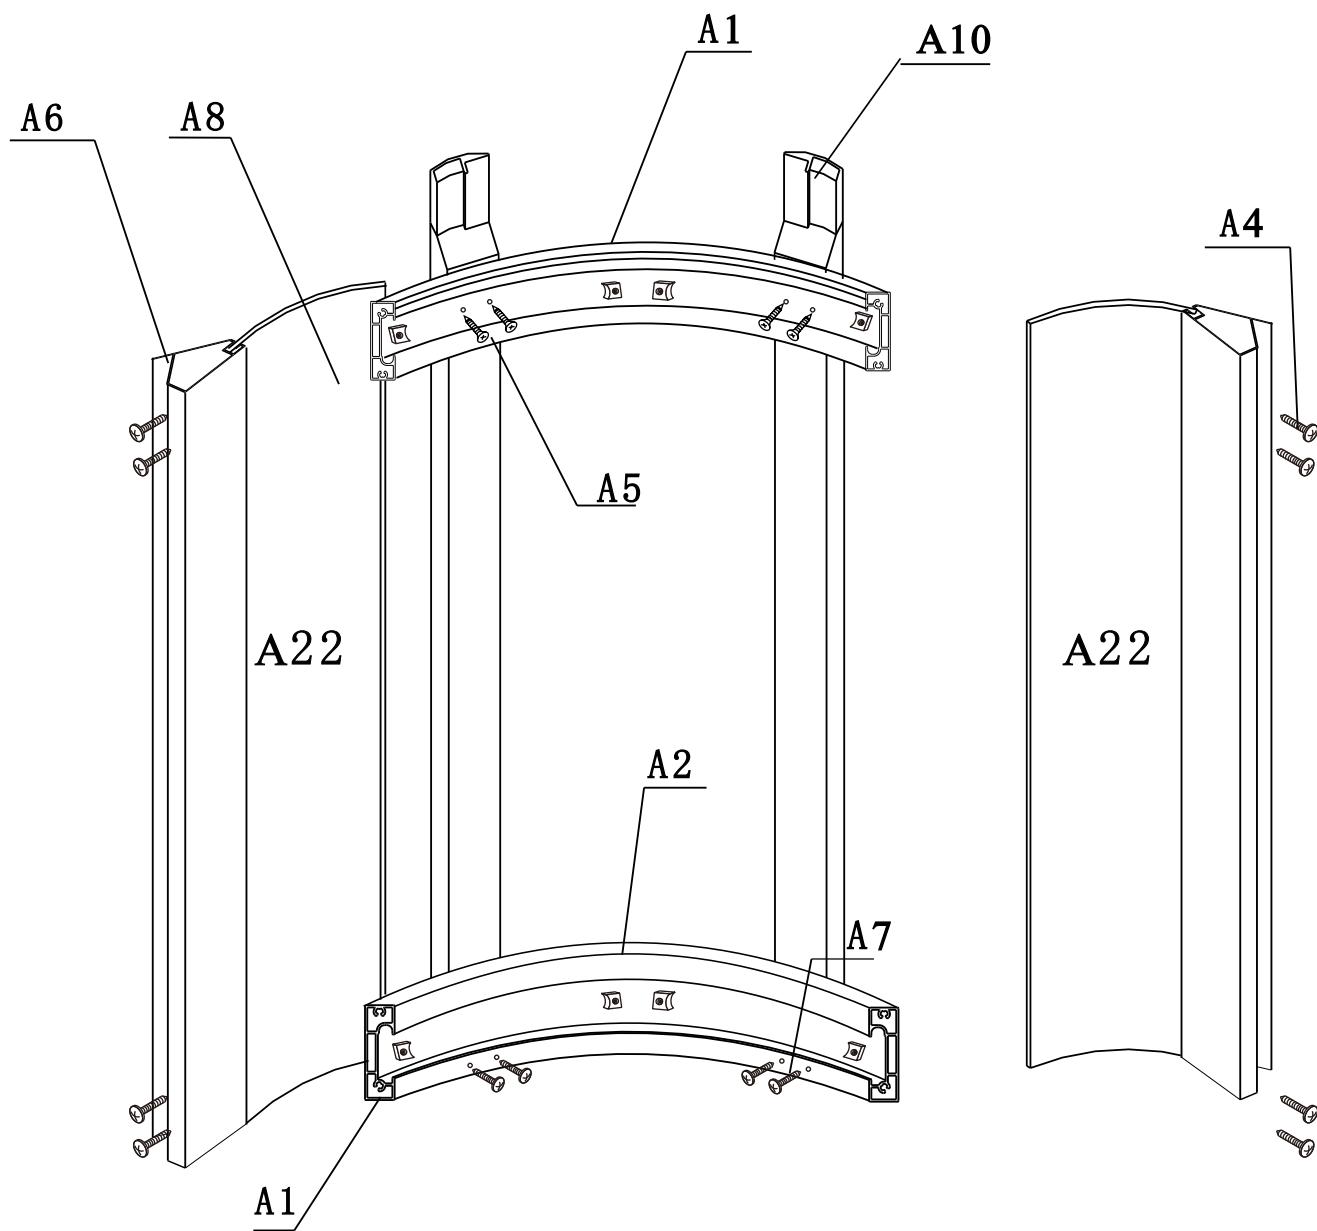

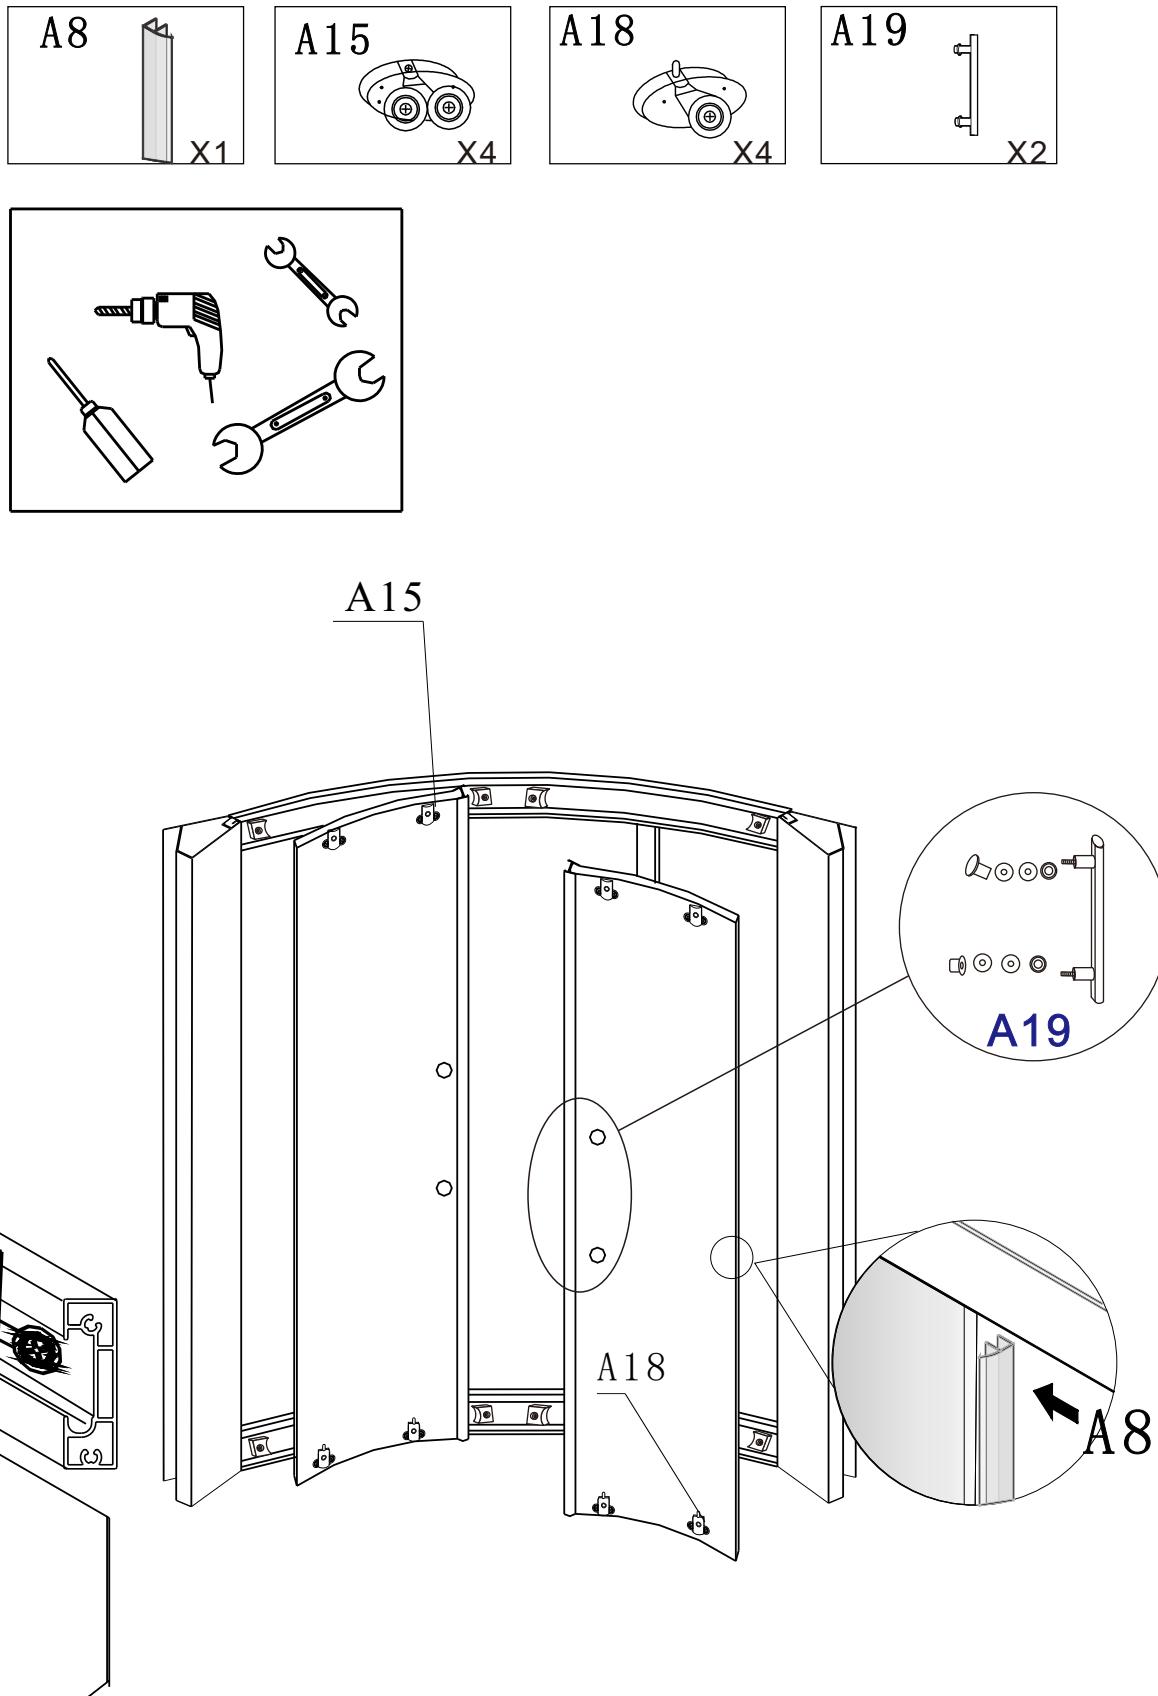

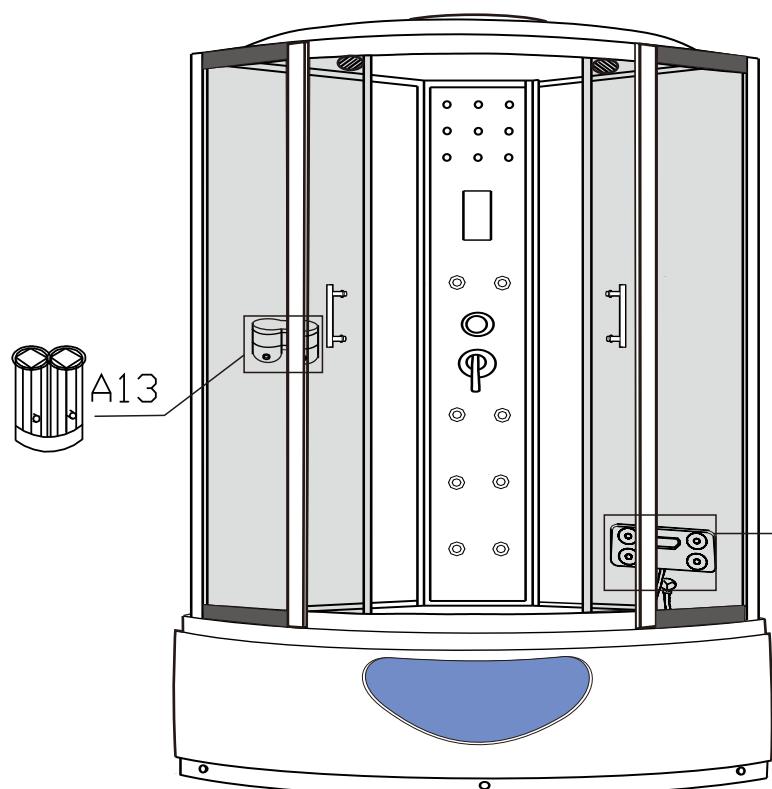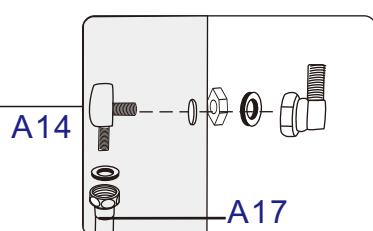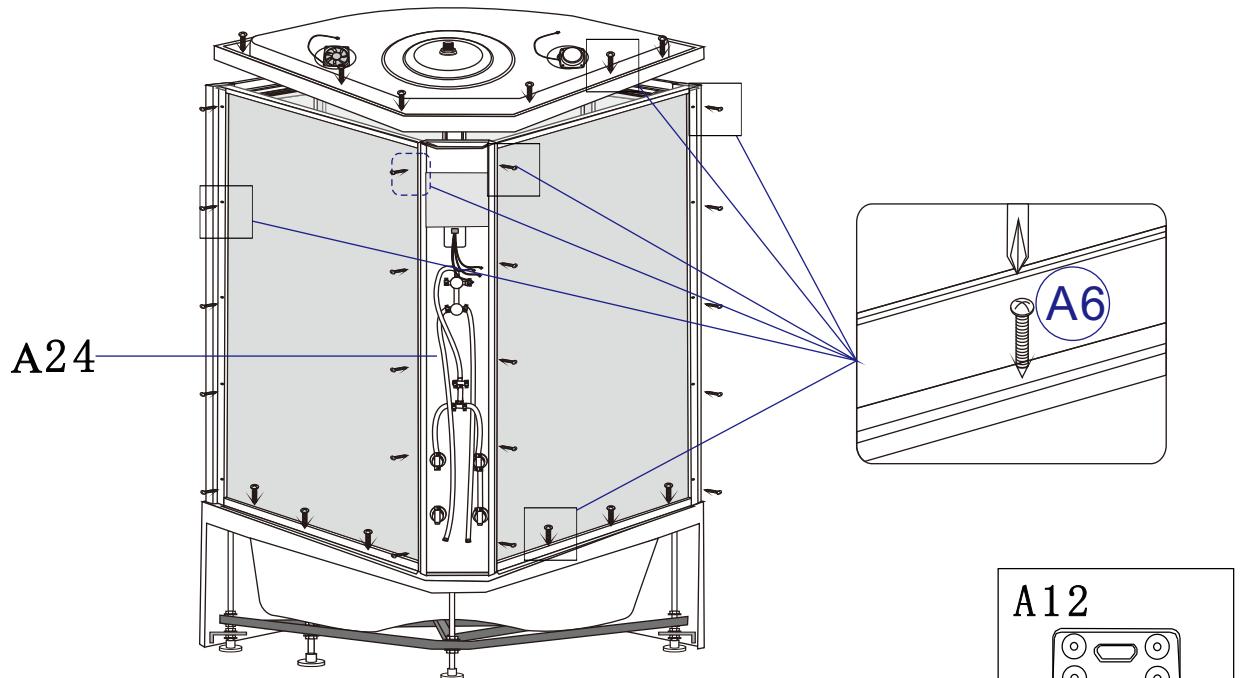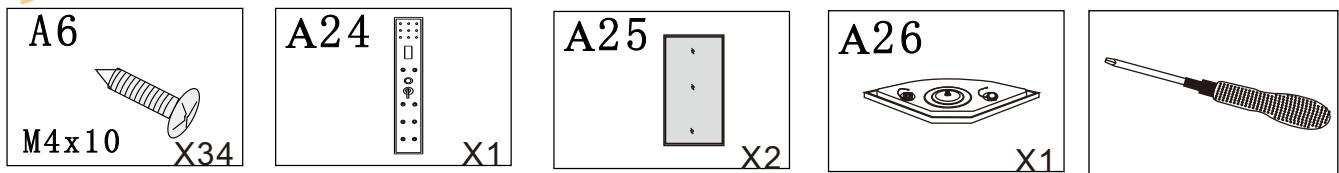

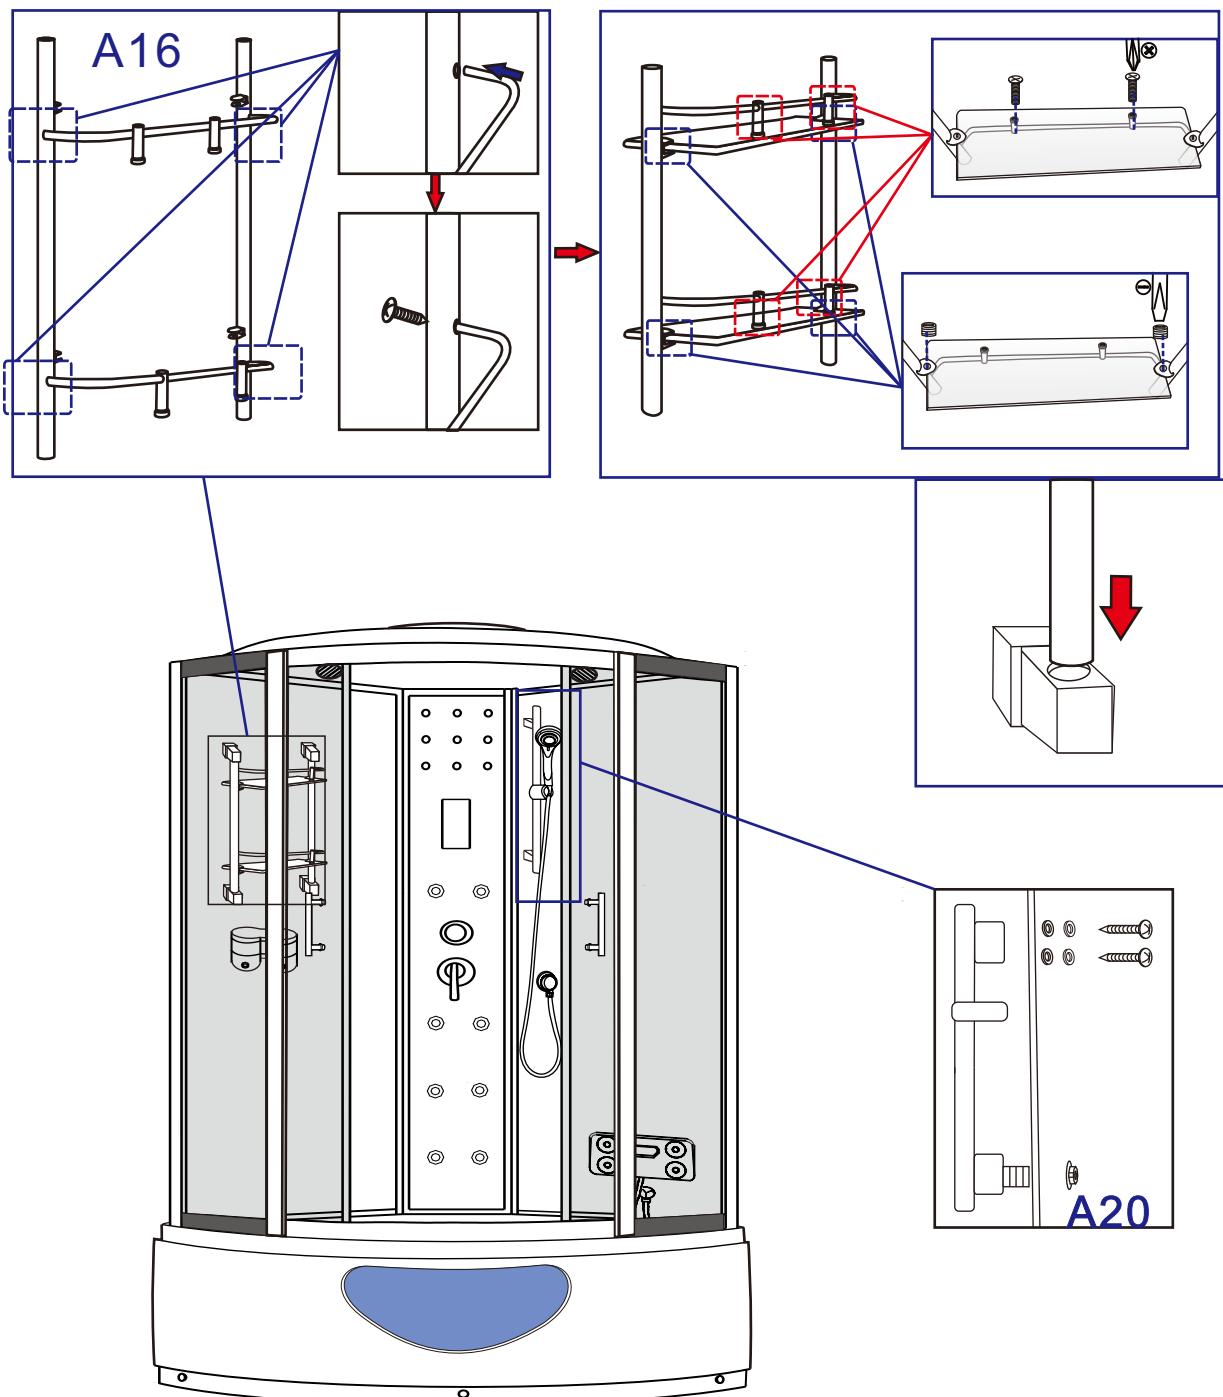

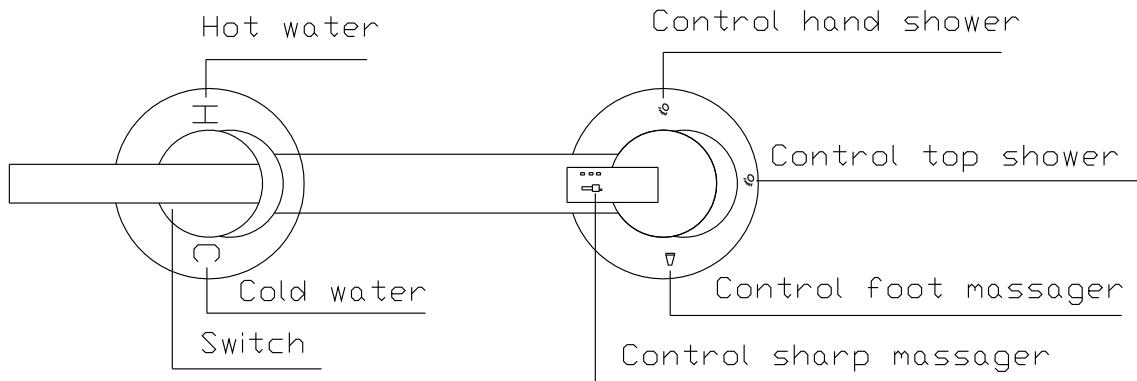

Using instruction for shower room


- 1, Open the switch, it can be adjust the hot and cold water by turing into right and left side, it is fine when you feel temperature is ok.
- 2, Turing the adjuster, it can control wanter running from the hand shower, foot massager,sharp massager and top shower.
- 3, The hydraulic pressure is 0.4Mpa in every part.
- 4, Please turn off the power and switch of the shower room after used it.
- 5, The glass of shower room is high-quality tampered glass, please don't impact it.

Power Request





DXD HEATER

MODEL SDP-1500 A
VOLTAGE 220-240VAC 50/60Hz
POWER 1.5KW HP 2

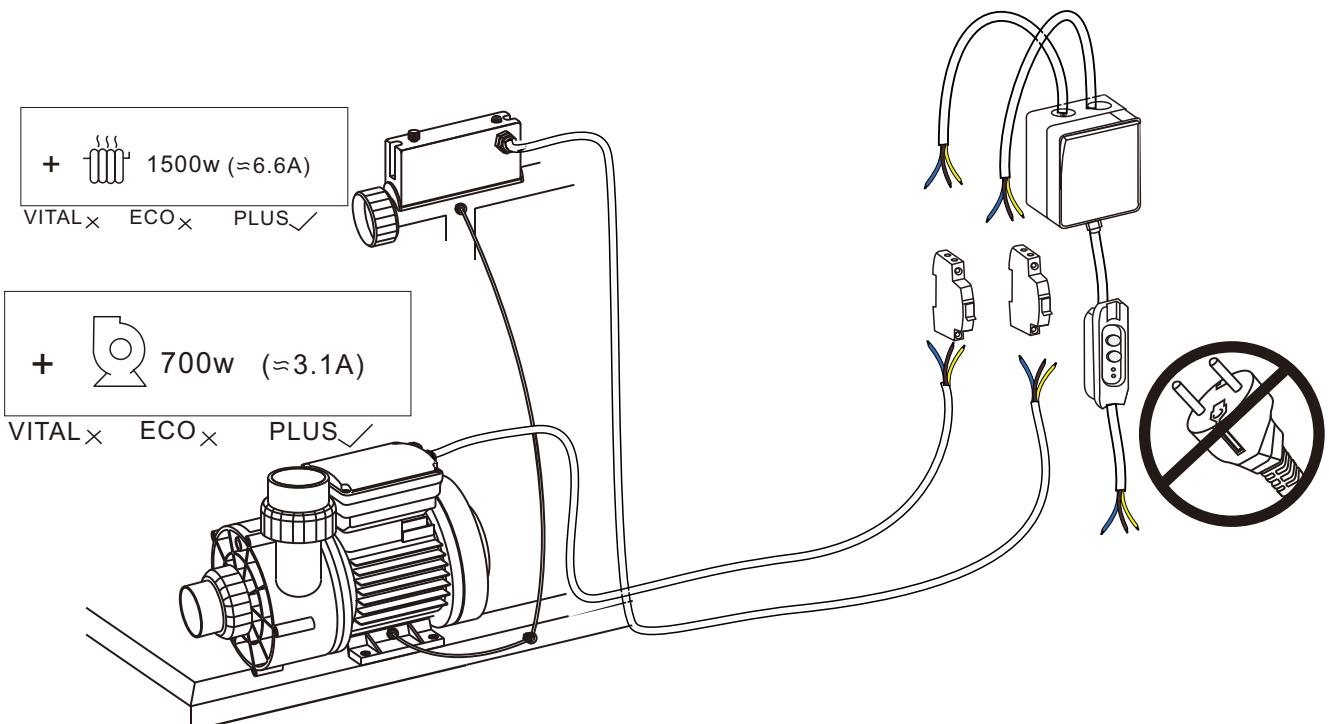


DXD PUMP

MODEL DXD-310 A AC 220-240V 50Hz 700W CLASS B IPX5
MAX WATER TEMPERATURE 50C 15u F/450V Hmin 1m

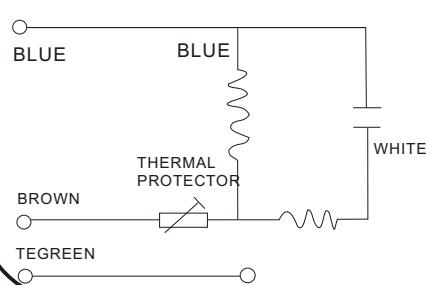

Ground properly!
Do Not Start Pump
Without Water!

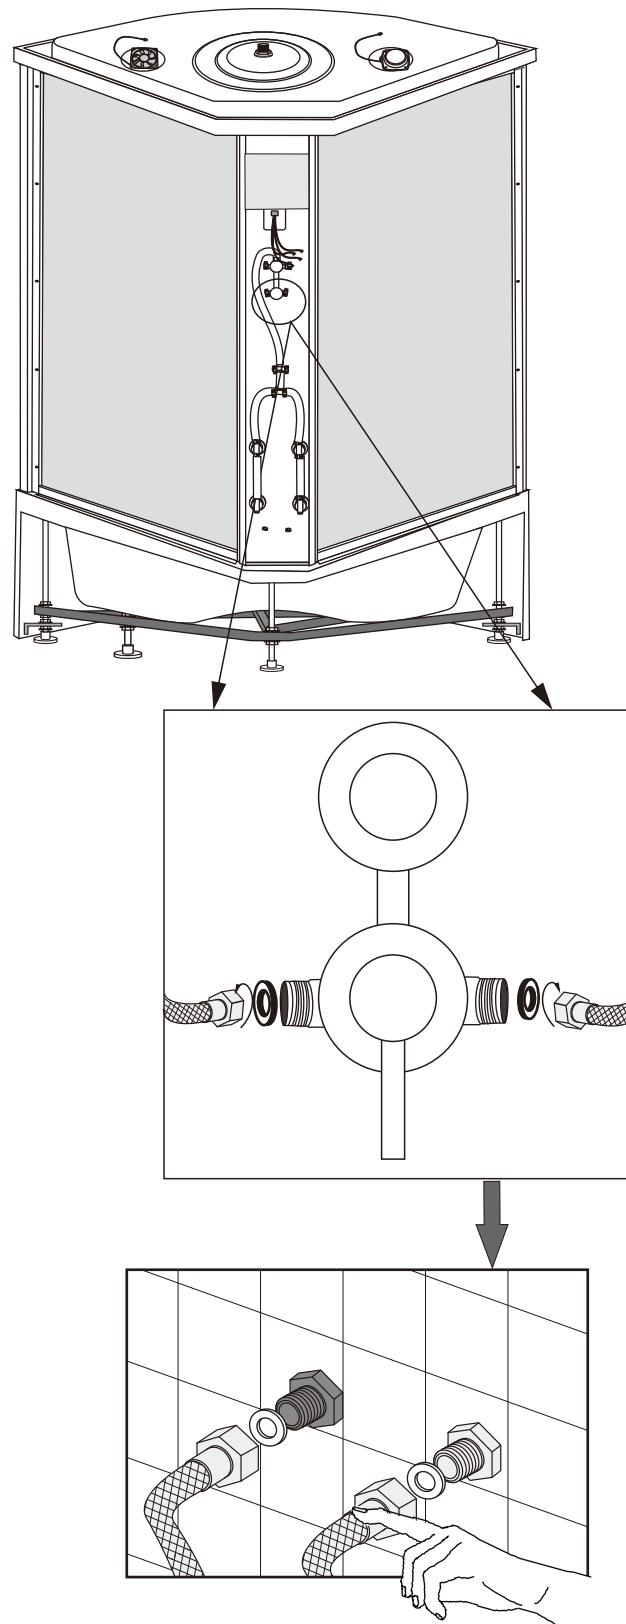

The hot and cold water pipe and connect parts should be bought by client.



This Y-track packed in
the tray package.

